


WMF 1300 S Utility Hook-Up Specifications

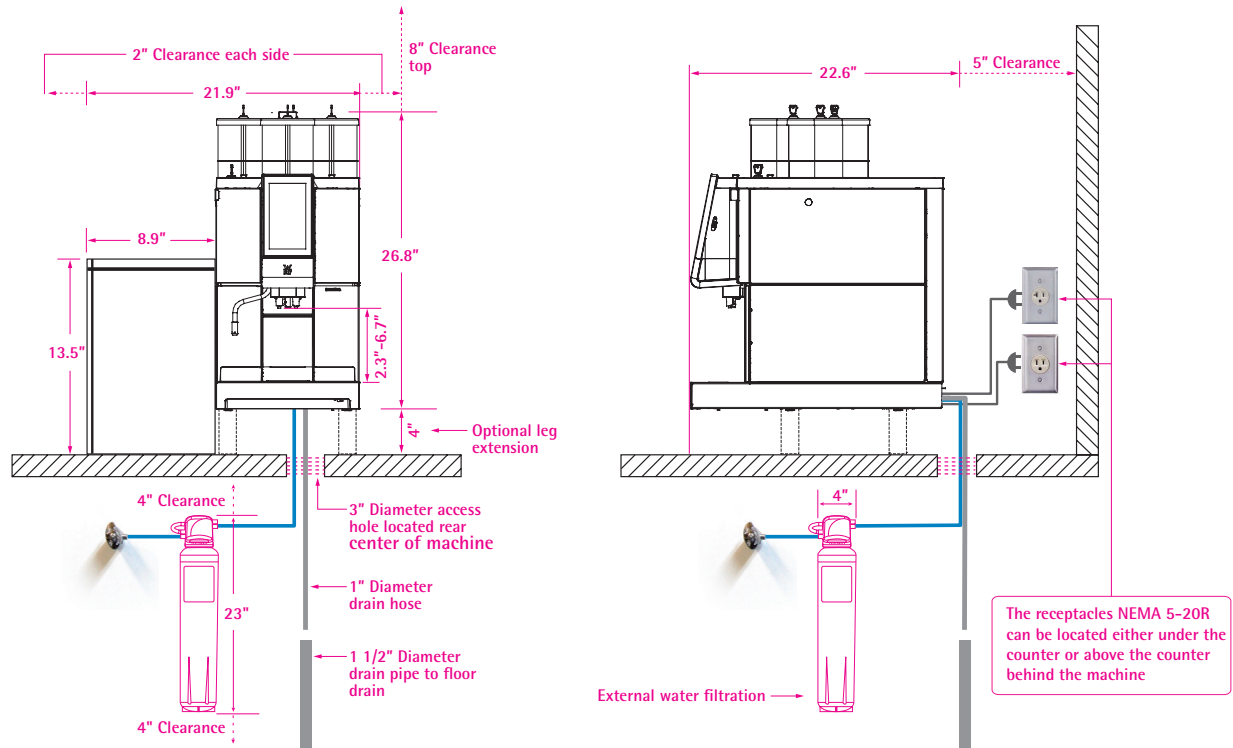


Note:

- For 1-Step setup a Side Cooler is required (Sold Separately). Item #: 1391926313
- The machine can be installed using internal water tank or with fixed water connection.
 - If installation with internal water tank, then use internal filtration system.
 - Internal Filter Cartridge – Item #: 3323322000 (1 included with the machine)
 - If installation with fixed water connection, then an external filtration system is required (Sold Separately).
 - External Filter Head – Item #: 9610000123
 - External Filter Cartridge – Item #: 9610000112
- Access hole is only required if any of the utility hook-ups are located under the counter. Water shut-off valve and drain pipe only applies to fixed water connection and drain options.

POWER, WATER SUPPLY, AND ACCESS REQUIREMENTS

	<ul style="list-style-type: none"> Machine receptacle type: NEMA 5-20R Breaker panel: 20 Amp dedicated 120V single phase circuit Nominal Power ratings: 1.9kW Power supply: 120V, 60 hz
	<ul style="list-style-type: none"> Cooler receptacle type: NEMA 5-15R
	<ul style="list-style-type: none"> 3" diameter access hole with collar (no sharp edges) Located centrally behind machine for water, drain hose and electrical
	<ul style="list-style-type: none"> Water shut-off valve with 3/8" compression fitting Back flow preventer in accordance with local requirements Water pressure requirement between 29-87 PSI (2-6 bar)
	<ul style="list-style-type: none"> Drain pipe to floor drain Copper or PVC in accordance with local health codes and regulations Diameter: 1 1/2" or larger

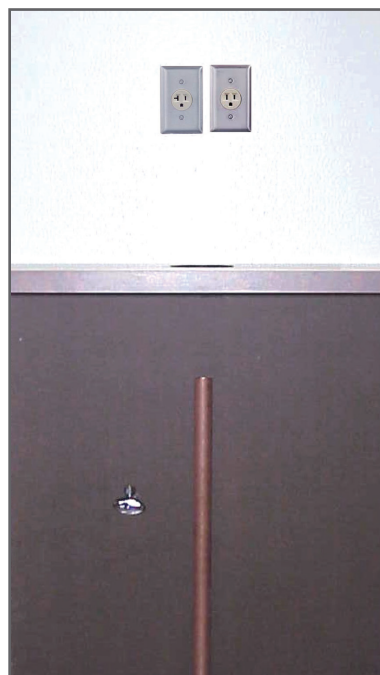

The receptacle, water shut-off valve and drain pipe must be within 3 feet (36") of the center of the location (footprint) of the machine.

Ideal under counter space for softener: 30" (minimum requirement: 28").